


GZM



Main Features

- ★ ***EXTREME SPEED*** up to **229m²/h!**
- ★ ***Revolutionary print head with RediJet Tech.***
- ★ ***GnTek Negative Pressure Recirculation System.***
- ★ ***Enhanced and energy-efficient drying system.***
- ★ ***Improved multi rolls media feeding system.***

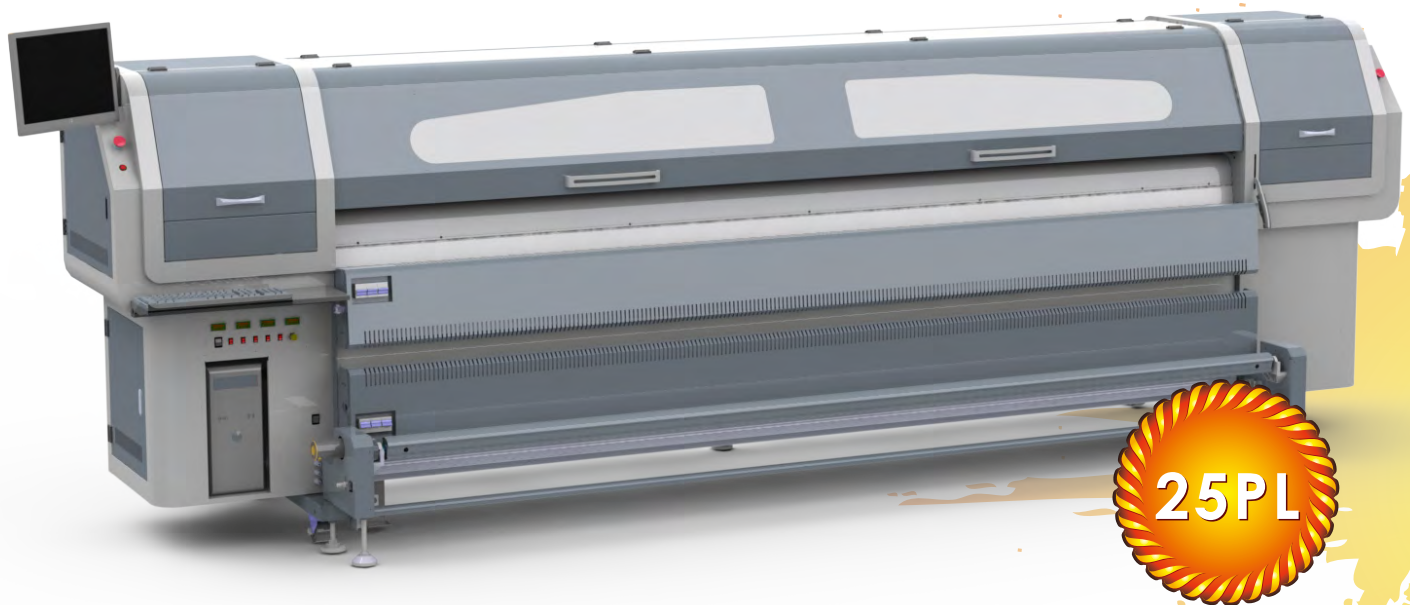

A wide range of applications solution!

With continuous ink recirculation and robust repairable construction, **Dimatix Starfire 1024** print head delivers unparalleled saturation and smooth gradient.



Reinforced and more precise chassis!

CNC aluminum beam and dual linear guide assure high speed, high resolution printing and long running life. Improved pinch rollers maintain precise and steady media delivery.




GnTek recirculation solution!

GZ Negative pressure recirculation system with Japanese components perfectly plays the advantages of Starfire head, assuring steady ink delivery and minimizing maintenance.



Multiple rolls feeding system!

It can deliver 2 rolls of media synchronously to increase output capacity. Balance bar system maintains precise and stable media feeding.



Self-developed drying system!

Ceramic-core thermal drying system controlled by industrial power switches, treats the printing evenly and efficiently, consumes much lower power and has longer running life.



Every smart design for friendly operating!

UPS intelligent socket; LED lights; reserved PC location; ink aerosol exhaust system.
No monitor equipped.

ITEM	SPECIFICATION	
Model	GZM3202SG	GZM3204SG
Print Head	2 Starfire 1024(25pl)	4 Starfire 1024(25pl)
Ink	C.M.Y.K solvent/eco-solvent(Optional 2-year eco-solvent ink)	
Ink supply system	GnTek Negative Pressure Recirculation System	
Media Type	Banner, Frontlit, Backlit, Vinyl, Film.....	
Feeding system	Automatic multiple rolls feeding system	
Drying system	Pre, mid, post and extended heater plus thermal drying system	
Printing Speed	300x400dpi 126m ² /h 600x400dpi 97m ² /h 300x600dpi 87m ² /h 600x600dpi 65m ² /h 300x800dpi 68m ² /h 600x800dpi 51m ² /h	300x400dpi 229m ² /h 600x400dpi 177m ² /h 300x600dpi 164m ² /h 600x600dpi 125m ² /h 300x800dpi 128m ² /h 600x800dpi 97m ² /h
Data Interface	External: USB2.0; Internal: High-speed SCSI	
Working Environment	Temp.23°C~29°C, Humidity:50%~80%	
Software	Photoprint10/Maintop.....+GZ control console	
Power	50Hz/AC,220V±10% 15A(printer)+16Ax2(thermal drying system)	
Installed/ Package Size	LxWxH(mm): 4800x1000x1500/ 4930x1150x1690	
G.W./N.W.	1145kgs/ 915kgs	

Specifications are liable to change without prior notice. All trademarks mentioned are property of their respective owners.

